

Aimpoint® 9000SC

If you want the shortest sight possible with a 2-ring mounting solution, the 9000SC is the natural choice. This medium-length sight is primarily designed to be used with semi-automatic shotguns and rifles. The length of this sight also makes it perfect for combination weapons (BBF) and drillings. It is also perfect when you need a really tough sight for handguns with heavy recoil.



Unique features of the 9000SC

- Ideal for rifles with shorter actions, semi-automatic firearms, drilling, combination weapons and magnum handguns
- New ACET technology allows 50,000 hours of operation on one battery
- 9000SC (black) – Available in 2 dot sizes (2 and 4 MOA)
- 9000SC Camo (Realtree Hardwoods Green®) - Available in 1 dot size (4 MOA)
- 2-ring configuration fits nearly all 30 mm ring mounting systems
- Submersible to 15 feet (5 meters)
- Unparalleled mounting flexibility
- Also available in a fixed 2X version (only in black)

Standard features on all Aimpoint sights

- Unlimited field of view
- Parallax-free with unlimited eye relief
- Unaffected by extreme weather conditions
- Rugged, durable construction
- No hazardous materials
- No laser emission that could be harmful to your eyes
- Mechanical switch for speed and reliability
- Increased aiming confidence



THE FUTURE IN SIGHT™

APPLICATION AREAS

Hunters

APPLICATION FIREARMS

Magnum handgun	Primary use
Semi-automatic rifle	Primary use
Rifle with shorter action	Primary use
Scout rifle	Secondary use
Combination rifle	Primary use (9000SC) (9000SC 2X) Secondary use (9000SC Camo)
Drilling	Primary use (9000SC) (9000SC 2X) Secondary use (9000SC Camo)

TECHNOLOGY

ACET Advanced Circuit Efficiency Technology

OPTICAL DATA

Reflex collimator sight	Red dot sight
LED (Light Emitting Diode)	Totally eye-safe
Red dot size	4 MOA* (9000SC) (9000SC Camo) 2 MOA* (9000SC) (9000SC 2X) 1 MOA* (9000SC 2X)
Parallax-free	No centering required
Eye relief	Unlimited
Anti-reflex coating	All surfaces & multi-layer coating
Magnification	1X (9000SC) (9000SC Camo) Fixed 2X power attachment (9000SC 2X)

ELECTRONIC DATA

Battery	One 3V Lithium battery, type 2L76 or DL1/3N
Battery life	50,000 hours
Mechanical switch	Dot intensity regulator, 10 settings
Settings	1Off, 9 daylight

MECHANICAL DATA

Material housing	Extruded aircraft aluminum
Surface finish	Anodised, semi-matte
Color	Carbon black (9000SC) (9000SC 2X) Camo pattern, Realtree Hardwoods Green® (9000SC Camo)
Adjustment	1 click = 13mm at 100 meters = 1/2" at 100 yards
Mounting solution	2 rings, 30 mm Ø

ENVIRONMENTAL DATA


Temperature range	-30° – +60° C, -20° – +140° F
Water resistance	Submersible to 15 ft, 5 m
Radioactive components used	None

DIMENSIONS

Length	160 mm, 6.3" (9000SC) (9000SC Camo) 195 mm, 7.7" (9000SC 2X)
Width/height	55 mm, 2.2" (9000SC) (9000SC Camo) 58 mm, 2.3" (9000SC 2X)
Minimum distance between rings	50 mm, 2.0"
Maximum distance between rings	115 mm, 4.5"
Weight	210 g, 7.4 oz (9000SC) 200 g, 7.0 oz (9000SC Camo) 280 g, 9.9 oz (9000SC 2X)

ARTICLE NUMBERS

4 MOA	11407 (9000SC) 11410 (9000SC Camo)
2 MOA	11417 (9000SC) 11409 (9000SC 2X)
1 MOA	11418 (9000SC 2X)

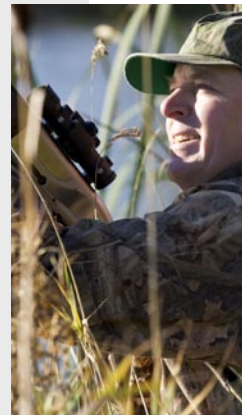

M00476

* MOA (minute of angle) 1 MOA = 30 mm at 100 meters = 1" at 100 yards